

SS12F~SS120F


1.0Amp Surface Mounted Schottky Barrier Rectifiers

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Built-in strain relief, ideal for automated placement
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed
250°C/10 seconds at terminals

Mechanical Data

- Case** : Molded plastic body
- Terminals** : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity** : Polarity symbol marking on body
- Mounting Position** : Any
- Weight** : 0.0014 ounce, 0.038 grams

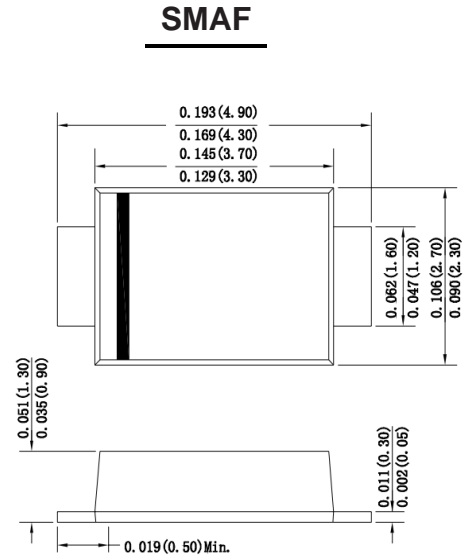

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SS12F	SS14F	SS16F	SS18F	SS110F	SS115F	SS120F	UNITS	
Maximum repetitive peak reverse voltage	V_{RRM}	20	40	60	80	100	150	200	V	
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	105	140	V	
Maximum DC blocking voltage	V_{DC}	20	40	60	80	100	150	200	V	
Maximum average forward rectified current at $T_L=100^\circ\text{C}$	$I_{(AV)}$	1.0							A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	30.0							A	
Maximum instantaneous forward voltage at 1.0A	V_F	0.55	0.70	0.85	0.95				V	
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	0.5 50			0.05 10			mA		
Typical thermal resistance	R_{qJA}	70.0							$^\circ\text{C}/\text{W}$	
Operating junction temperature range	T_J	-55 to +125			-55 to +150				$^\circ\text{C}$	
Storage temperature range	T_{STG}	-55 to +150								$^\circ\text{C}$

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

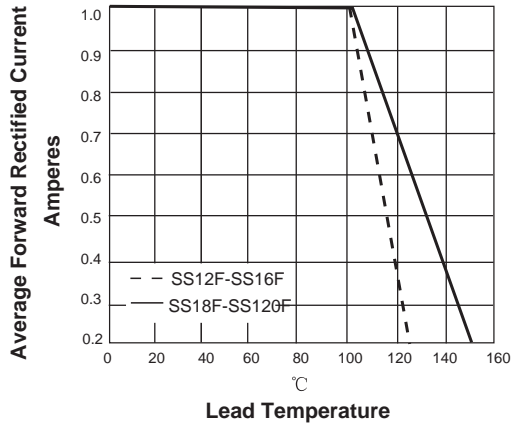


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

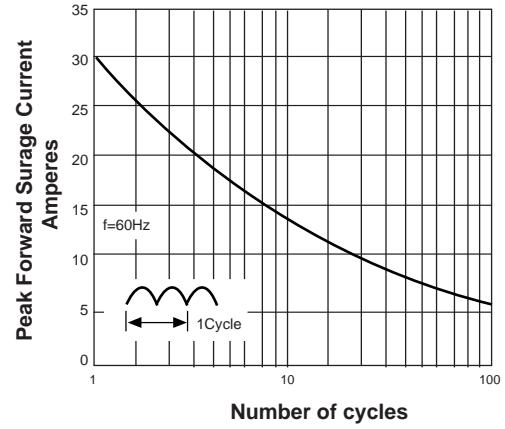


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

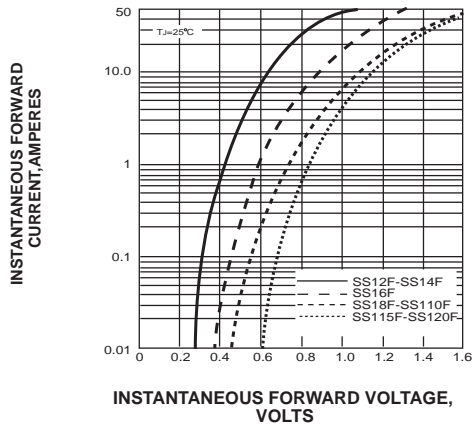


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

